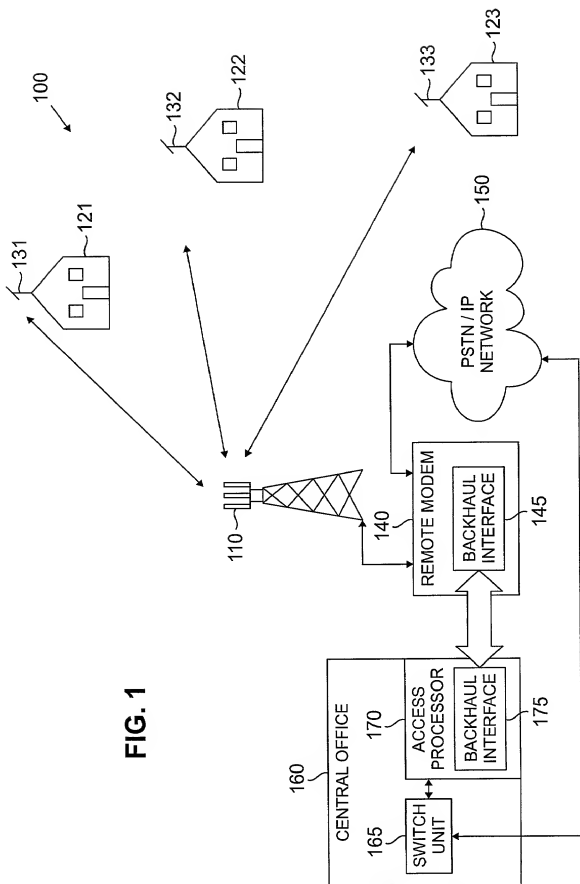


FIG. 1



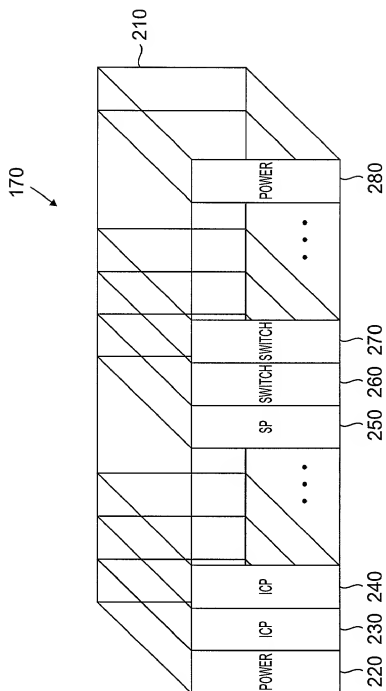


FIG. 2

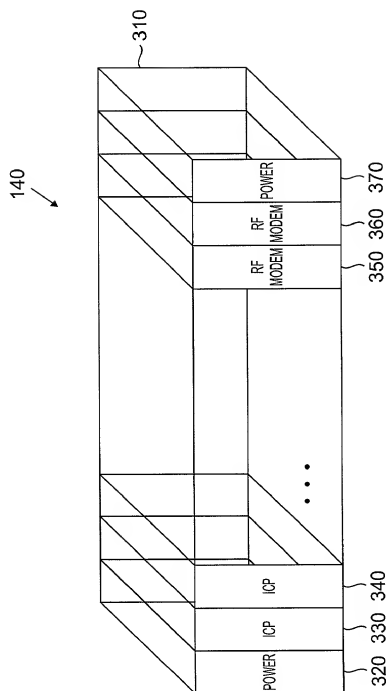


FIG. 3

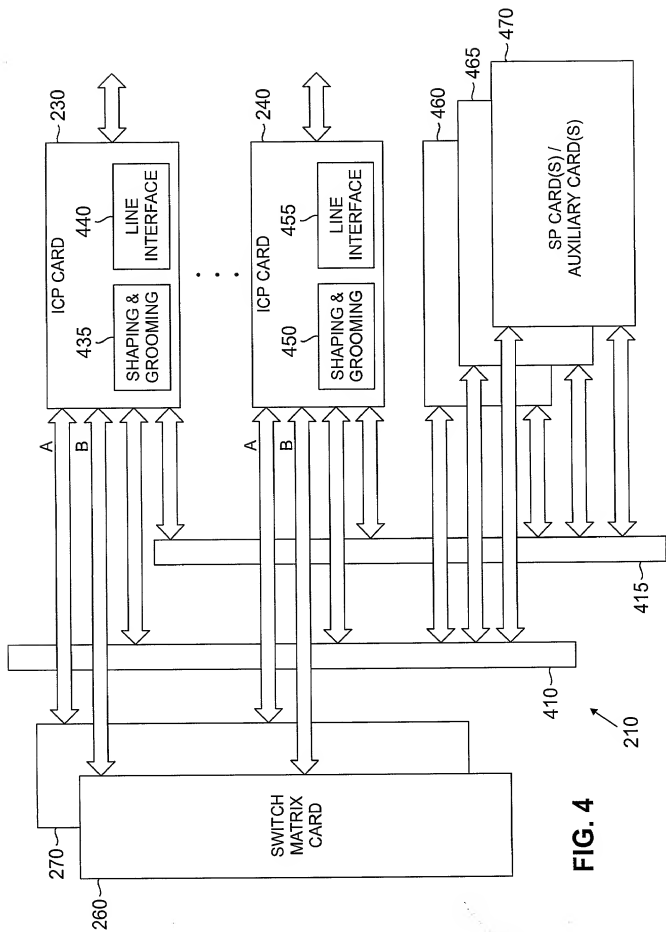


FIG. 4

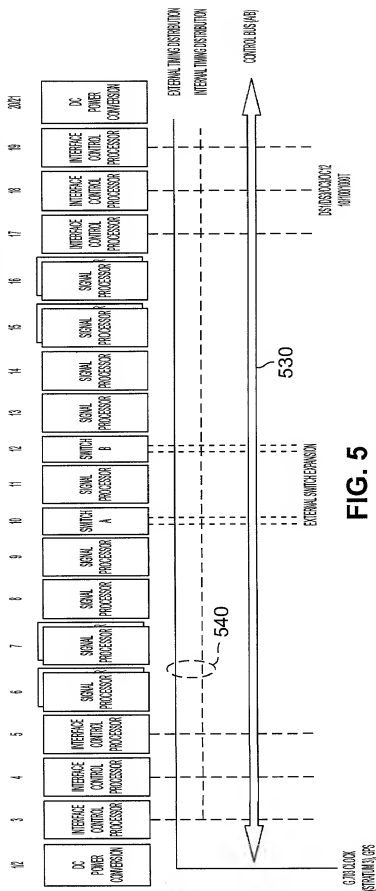
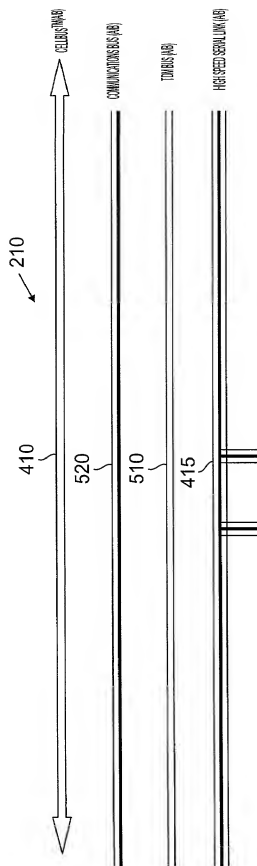


FIG. 5



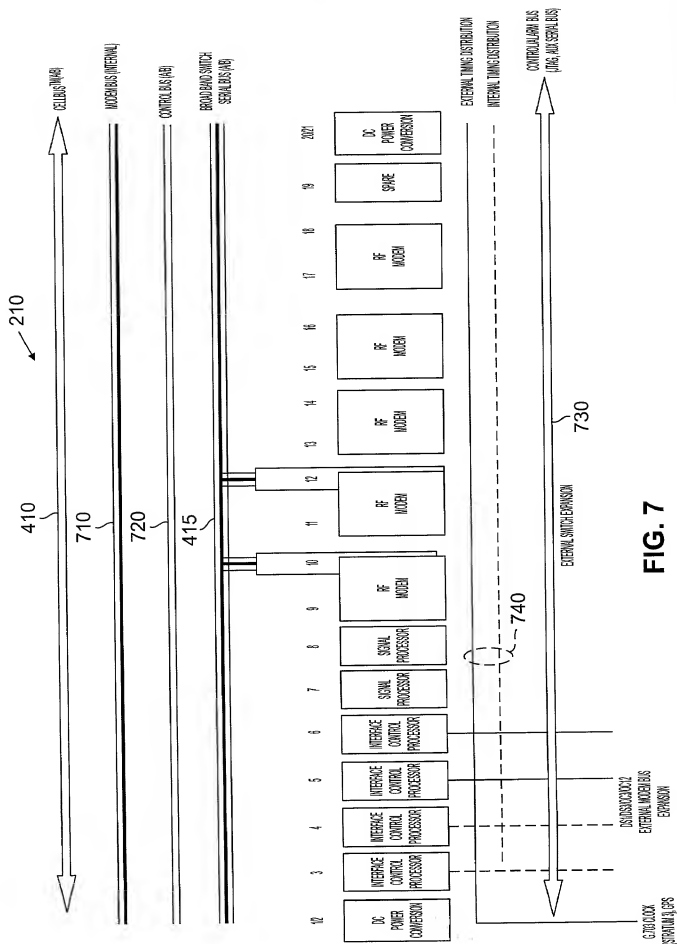


FIG. 7

8/13

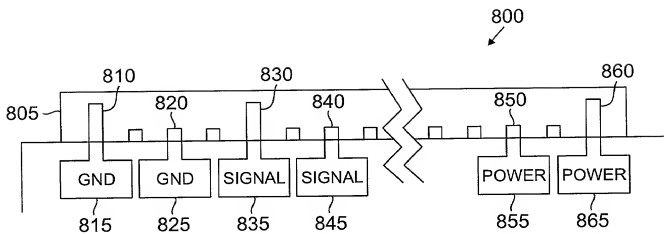


FIG. 8

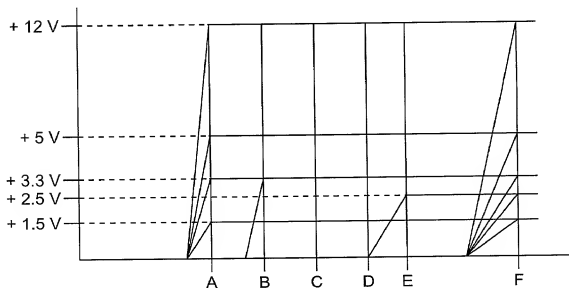


FIG. 9

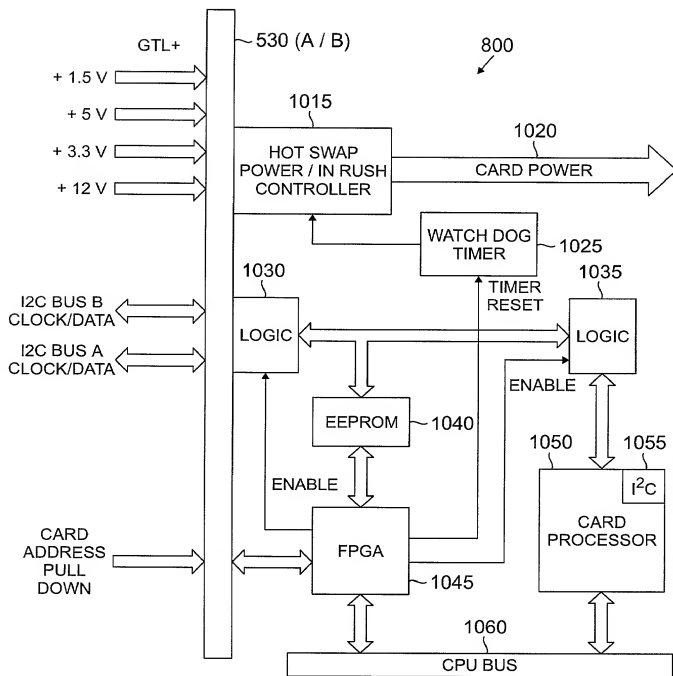


FIG. 10



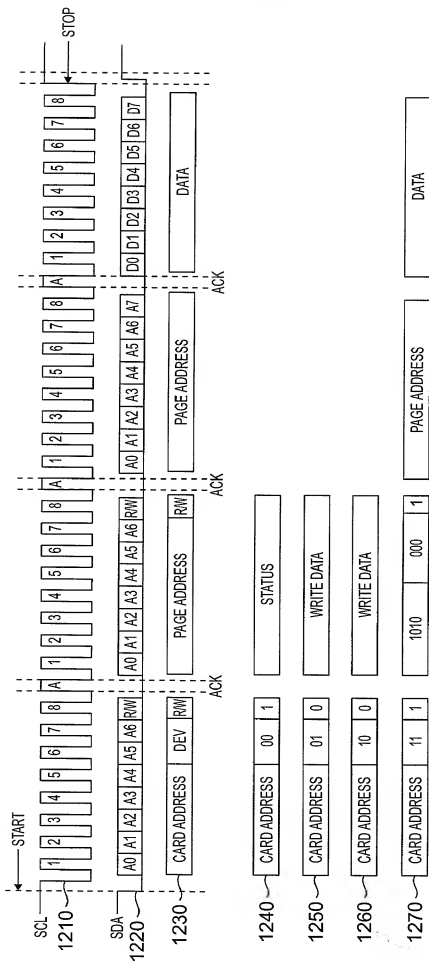


FIG. 12

1280	CARD ADDRESS = SLOT ID		DEV = 00 = CARD STATUS
	RW = 1 = READ		DEV = 01 = CARD CONTROL
	RW = 0 = WRITE		DEV = 10 = CARD PROCESSOR
	DUPLICATED IN 1ST 2 BYTES		DEV = 11 = CARD EEPROM

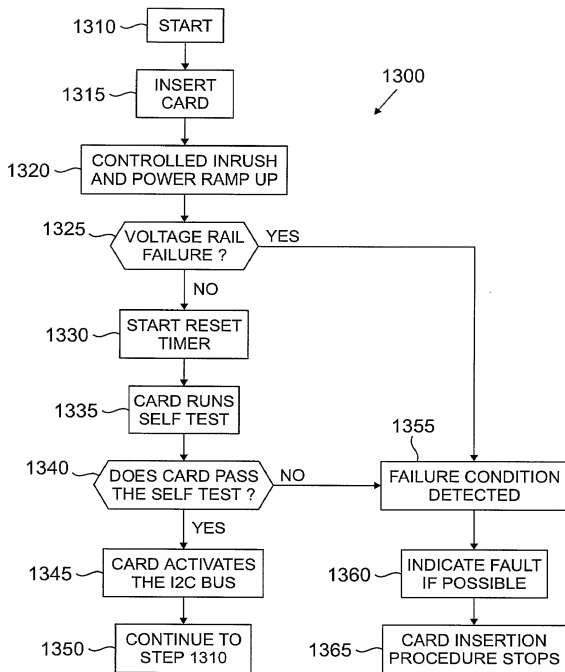


FIG. 13

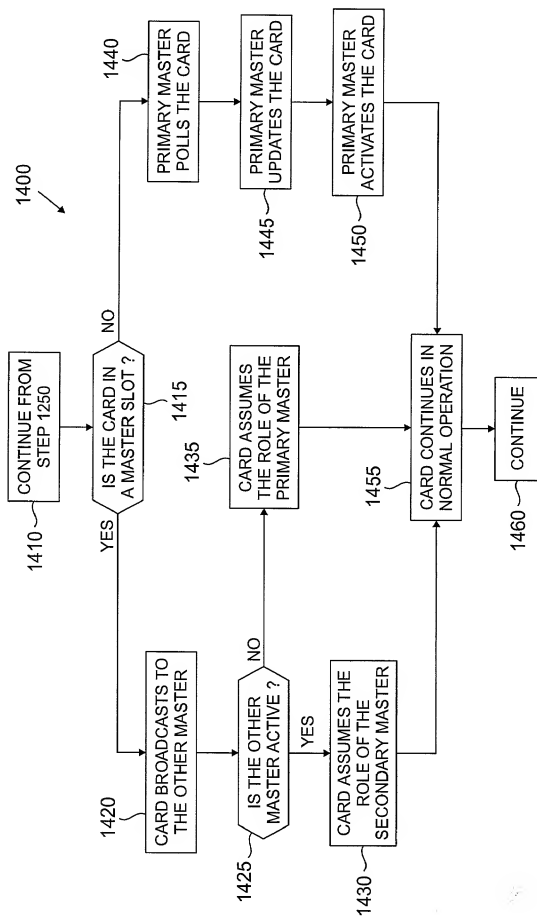


FIG. 14